



# NECURON® 1001

## BOARD MATERIAL - TECHNICAL DATA SHEET


US  
1/2

### CHARACTERISTICS

- excellent physical properties

### APPLICATIONS

- fixtures and gauges
- master and copy models
- models with high mechanical stress

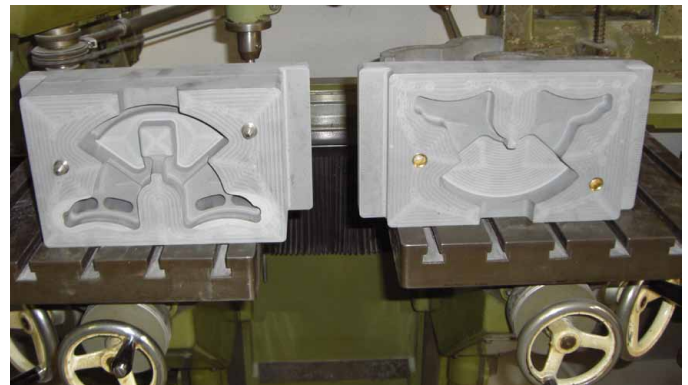

### TECHNICAL DATA

Color	grey
Coefficient of thermal expansion	approx. $27.77 \times 10^{-6} \text{ F}^{-1}$
Temperature resistance	approx. 152 °F
Shore D	approx. 83
Compressive strength	approx. 9,572 psi
Flexural strength	approx. 10,297 psi
Density	approx. 74.91 lbs/ft <sup>3</sup>
Abrasion resistance (at defined parameters)	approx. 0.041 in <sup>3</sup>
Fire protection classification	-
Electrical current resistance	approx. - $\Omega \times \text{in}$
Notched impact strength	approx. 4.71 ft.lb./in <sup>2</sup>
Thermal conductivity	approx. - BTU-in/hr-ft <sup>2</sup> -°F

- Contains no halogens, plasticizer or solvent
- Manufactured fluorocarbohydrate-free
- Physiologically harmless

### DIMENSIONS

60	24	2	inch
60	24	3	inch
60	24	4	inch

Surfaces machined parallel.  
Other dimensions on request.

### STORAGE/TRANSPORT

NECURON®-boards should be stored on a flat underground and in a dry space at a temperature between 64.4°F and 77°F. Variations in temperature should be avoided during the transport and storage.



# NECURON® 1001

## BOARD MATERIAL - TECHNICAL DATA SHEET

US  
2/2

### PROCESSING

Adhesive	Color	Mixture ratio A to B (by weight)	Pot life in minutes at 68°F	Curing time at 68°F in hours
NECURON® K8N	amber	100:50	10	5

or usual and compatible patternmaking adhesives/resins  
We recommend that boards are plane-parallel to ensure good glue joints.

### MACHINING

Machining temperature: 68°F - 77°F  
Tools: Metal-cutting tools, large receptacle for removing shavings is required

### MILLING PARAMETERS

Type of tool	ROUGHING	FINISHING
	Finishing tools d = 3.15 in	Finishing tools d = 3.15 in
Tool diameter [d] (in)	3.15	3.15
Cutting speed [Vc] (ft./sec)	164	164
Speed [n] (1/min)	12000	8000
Feed speed (ft./min)	22.97	16.40
Tooth speed [fz] (in)	0.0059	0.0059
Number of teeth [z]	4	4
Cutting depth [ae] (in)	0.118	0.020
Cutter mark length [fzeff] (in)	1.50	0.20

### NECURON® 1001

- This material does not contain any fillers that release harmful dust during machining. Nevertheless the dust content in the air should not rise above 0.2 lb/in<sup>3</sup>. Safety procedures recommended by the vocational co-operative of the chemical industry should be complied with.
- The article is not a regulatory product according to ICC regulations. In accordance with general local and national regulations waste is to be disposed by incineration in authorized places or conveyed to authorized tips (EAK 120105).
- Technical statements and recommendations refer to current standard of technique and are based on our own experience. Further developments and improvements are reserved. Due to the variety of processing possibilities own experiments are recommended to optimise results.
- This data sheet is not legally binding. Actual specifications and / or features may vary.